



**Stainless steel recessed wall luminaires**  
Unshielded or directed light distribution

A series of recessed wall luminaires with unshielded or directed light distribution. The luminaires with directed light are ideally suited for the glare-free illumination of ground surfaces, building entrances, stairs and footpaths. The unshielded luminaires have a directing and guiding light effect. The illuminance level on the lit surface is lower, but the ambient brightness is greater with increased vertical illuminance.



Aluminum housing · Stainless steel faceplate · White or clear safety glass

LED color temperatures: 2700 K, 3000 K, 3500 K, 4000 K


BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at [www.bega-us.com](http://www.bega-us.com)

Luminaires are provided with #4 brushed stainless steel trims.

NRTL listed to North American standards · Suitable for wet locations  
Protection class IP 65

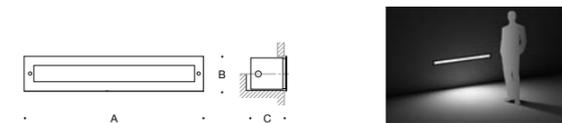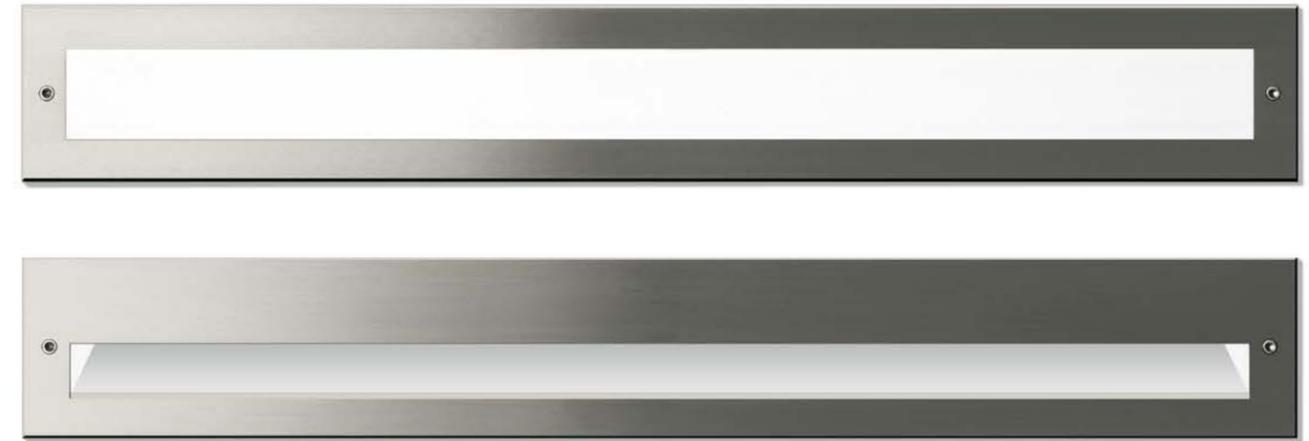

Unshielded				
	LED	A	B	C
<b>24 104</b>	9.6 W	25%	5	5
<b>24 105</b>	23.6 W	49	5	5
<b>24 106</b>	30.4 W	60%	5	5

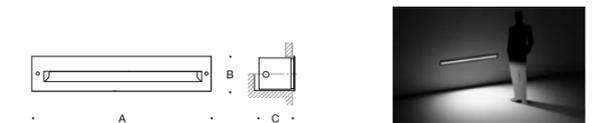

Directed				
	LED	A	B	C
<b>24 107</b>	13.5 W	25%	5	5
<b>24 108</b>	27.0 W	49	5	5
<b>24 109</b>	39.2 W	60%	5	5