



**24 V DC stainless steel recessed wall luminaires**  
RGB, location, symmetric and asymmetric

A series of recessed wall luminaires with color changing RGB for additive color mixing. Designed to be installed in walls or other vertical surfaces for both interior and exterior applications.

All luminaires in this series require a remote 24 V DC class 2 power supply suitable to operate the intended LED wattage, see page 405.

Stainless steel housing and faceplate  
Clear safety glass with optical texture or white glass  
Reflector made of pure anodized aluminum

LED color temperatures: 2700K, 3000K, 3500K, 4000K

BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at [www.bega-us.com](http://www.bega-us.com)

Luminaires are provided with #4 brushed stainless steel trims

NRTL listed to North American standards · Suitable for wet locations  
Protection class IP 67



Location luminaire  
Unshielded light




Recessed luminaire  
Symmetric light distribution



Recessed luminaire  
Asymmetric light distribution



On request, we can also supply these luminaires in the LED light colors green, blue, amber or red.

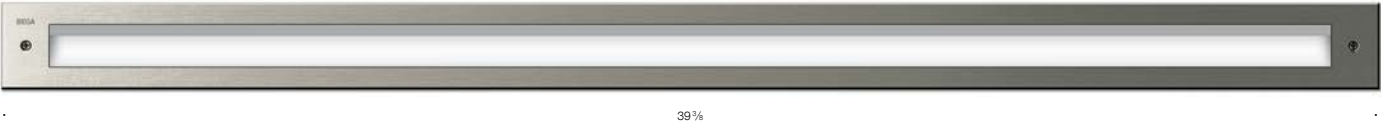

39 3/8"




4"



7 7/8"



15 3/4"



Location luminaires				
	LED	A	B	C
<b>88 300*</b>	0.1 W	4	1 1/2	2 3/4
<b>88 301*</b>	0.2 W	7 7/8	1 1/2	2 3/4
<b>88 302*</b>	1.0 W	15 3/4	1 1/2	2 3/4
<b>88 303*</b>	1.5 W	39 3/8	2 1/8	4

Symmetric				
	LED	A	B	C
<b>77 004*</b>	3.0 W	15 3/4	2 1/8	4
<b>77 012*</b>	7.9 W	39 3/8	2 1/8	4

RGB				
	LED	A	B	C
<b>88 897*</b>	3.0 W	7 7/8	1 1/2	2 3/4
<b>88 898*</b>	7.2 W	15 3/4	1 1/2	2 3/4
<b>88 899*</b>	14.5 W	39 3/8	2 1/8	4

Asymmetric				
	LED	A	B	C
<b>77 001*</b>	3.0 W	15 3/4	2 1/8	4
<b>77 002*</b>	7.9 W	39 3/8	2 1/8	4

\* Remote driver required