



Ceiling and wall luminaires

A series of ceiling and wall luminaires with hand-blown, three-ply opal glass. This family of luminaires can be utilized individually or in groups for glare-free illumination of interior and exterior spaces.



Aluminum housing · Three-ply opal glass

LED color temperatures: 2700 K, 3000 K, 3500 K, 4000 K

BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at [www.bega-us.com](http://www.bega-us.com)

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations  
Protection class IP 64

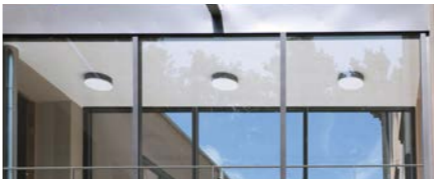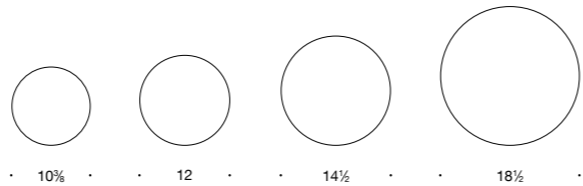

Ceiling and wall					
		LED	A	B	
33 636	ADA	14.2 W	10 3/8	3 1/4	
33 638	ADA	19.6 W	12	3 3/8	
33 639	ADA	26.1 W	14 1/2	3 5/8	
33 640	ADA	43.5 W	18 1/2	3 7/8	