



Ceiling and wall luminaires

A series of ceiling and wall luminaires with hand-blown, three-ply opal glass or impact-resistant polyethylene diffusers. This family of luminaires can be utilized individually or in groups for glare-free illumination in interior and exterior spaces. The impact-resistant diffuser adds strength and security in locations where glass cannot be utilized.



Aluminum housing
Three-ply opal glass or impact-resistant high density polyethylene diffuser

LED color temperatures: 2700 K, 3000 K, 3500 K, 4000 K

BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations
Protection class IP 65

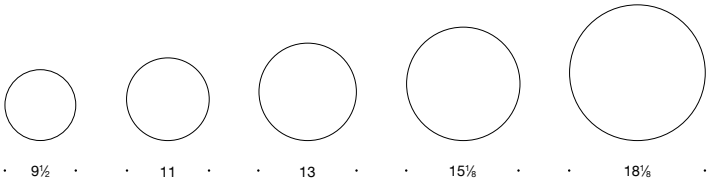

Three-ply opal glass

	LED	A	B
55 115	3.0 W	9 1/2	3 3/8
55 116	6.7 W	11	4 1/4
55 117	15.6 W	13	4 1/4
24 222	20.2 W	15 1/8	4 1/4
24 223	28.1 W	18 1/8	4 7/8

Polyethylene

	LED	A	B
24 225	6.7 W	11	4 1/4
24 226	15.6 W	13	4 1/4
24 227	20.2 W	15 1/8	4 1/4
24 228	28.1 W	18 1/8	4 7/8