



Linear ceiling and wall luminaires

A series of linear ceiling and wall luminaires with unshielded light. The narrow aluminum trim around the white glass emphasizes the linear design of this luminaire family. Arranged individually, in continuous bands of light or grouped together, these luminaires can accentuate building architecture while providing glare-free illumination.



Die-cast aluminum · White safety glass

LED color temperatures: 2700 K, 3000 K, 3500 K, 4000 K

BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations
Protection class IP 65

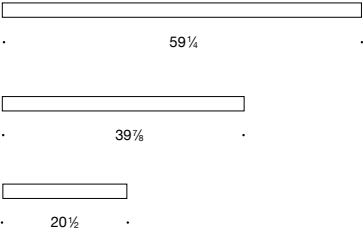

Ceiling and wall luminaires				
	LED	A	B	C
24 318	15.8 W	20 ½	2 ¾	4 ⅞
24 319	32.0 W	39 ⅞	2 ¾	4 ⅞
24 320	47.7 W	59 ¼	2 ¾	4 ⅞

