


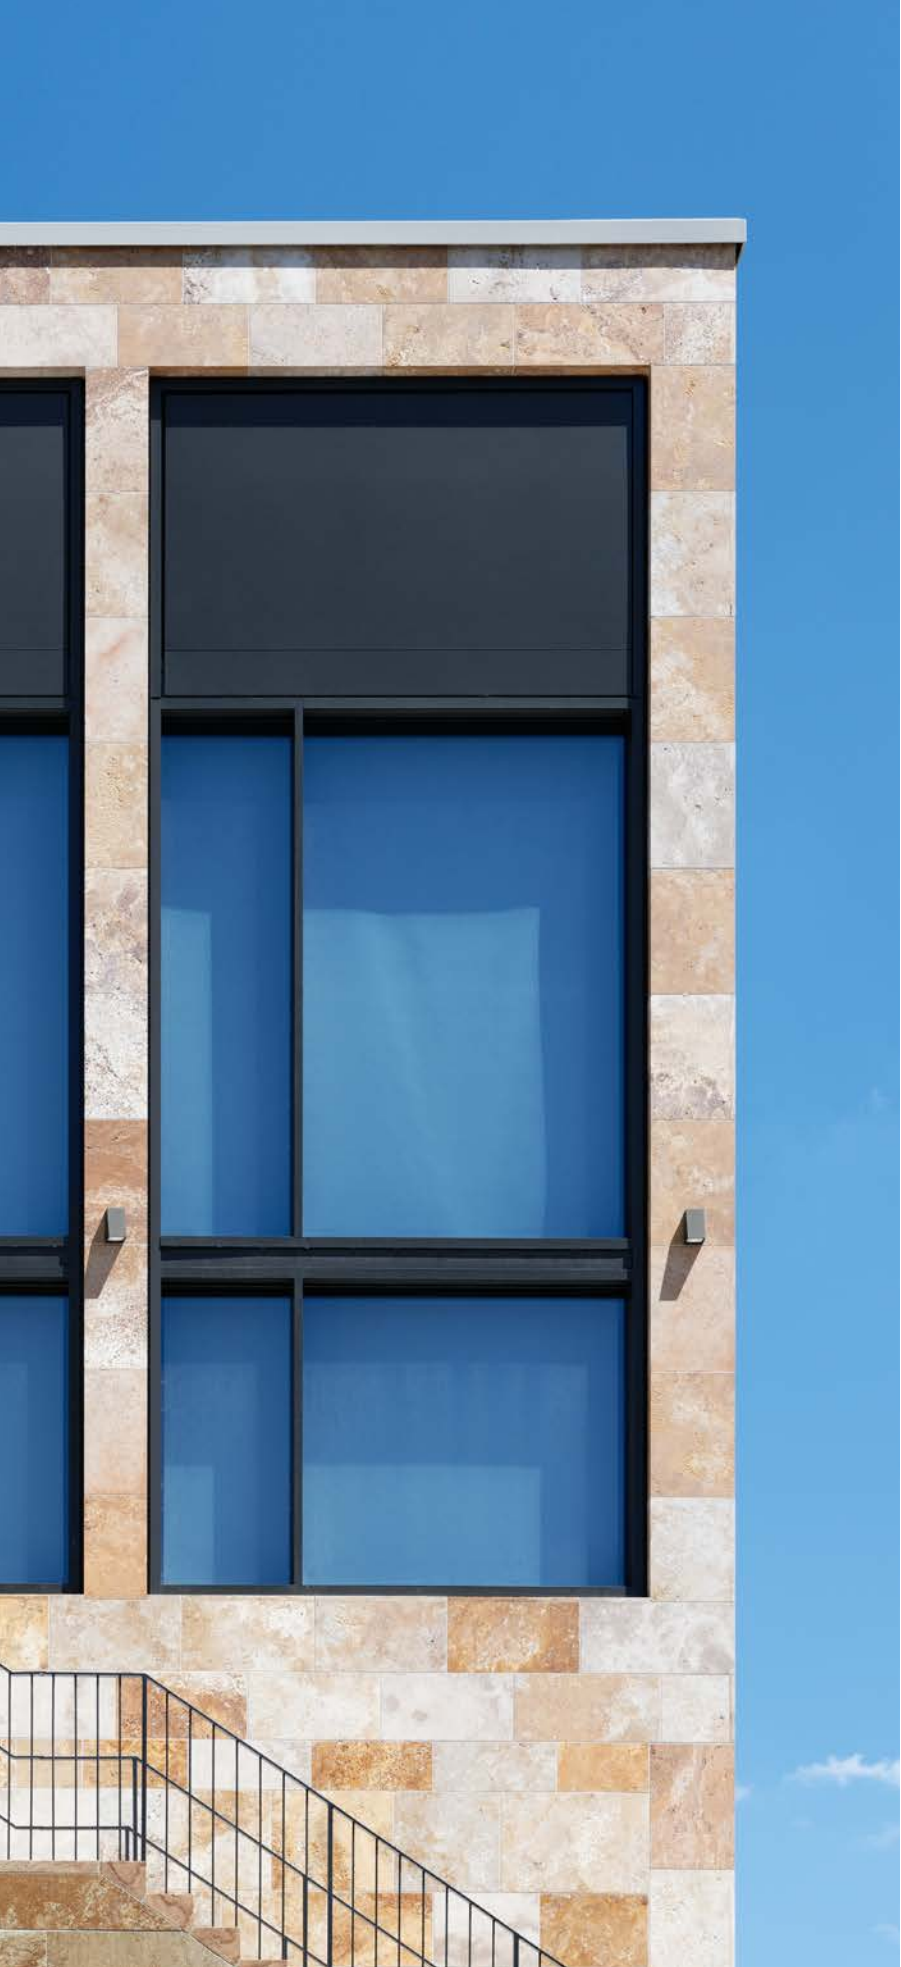

Wall luminaires
with symmetric or asymmetric light distribution

A series of wall mounted luminaires with symmetric or asymmetric light distribution. This group of luminaires is designed for general illumination of pathways and walkways from various mounting heights.

Die-cast aluminum · Safety glass
Reflector made of pure anodized aluminum

LED color temperatures: 2700 K, 3000 K, 3500 K, 4000 K


BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations
Protection class IP 64



Symmetric
light distribution



Asymmetric
light distribution



Symmetric light distribution				
	LED	A	B	C
33 814	7.9 W	4 ⅞	7 ½	4 ⅞
33 816	13.9 W	5 ⅞	9	5 ¼

Asymmetric light distribution				
	LED	A	B	C
33 815	7.9 W	4 ⅞	7 ½	4 ⅞
33 817	13.9 W	5 ⅞	9	5 ¼