



#### Compact floodlights with outrigger arm

A series of very compact floodlights with mounting canopy and outrigger arm. This family of floodlights is available in various sizes and light distributions. When paired with the comprehensive range of accessories, this family of luminaires sets the floodlighting standard with regards to cost effectiveness, compactness and efficiency.

Die-cast aluminum · Stainless steel outrigger arm · Safety glass  
Reflector made of pure anodized aluminum

LED color temperatures: 2700K, 3000K, 3500K, 4000K

BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at [www.bega-us.com](http://www.bega-us.com)

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.



NRTL listed to North American standards · Suitable for wet locations · Protection class IP 65





½" I.P.S. nipple

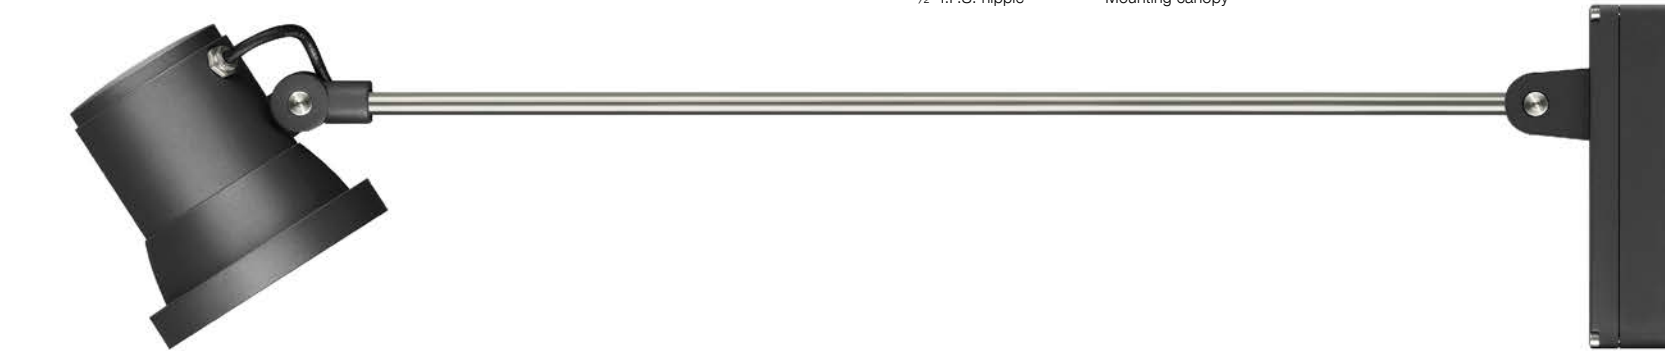

Mounting canopy



Compact floodlights · wide							Accessories	
	LED	β	A	B	C	D		
<b>77 756</b>	8.2 W	56°	4 1/8	27 5/8	4 1/4	7 1/2	<b>70 050</b>	<b>70 755</b>
<b>77 757</b>	19.0 W	41°	5 5/8	27 5/8	5 5/8	7 1/2	<b>70 055</b>	<b>70 756</b>
<b>77 665</b>	17.7 W	47°	6 1/4	27 5/8	6 1/2	7 1/2	<b>70 060</b>	<b>70 757</b>

 Elliptical spread lens     180° glare shield    β = Beam angle