



Floodlights
with outrigger arm

A series of compact rectangular floodlights with mounting canopy and outrigger arm. Available in various sizes and distributions this family of luminaires sets the floodlighting standard with regards to cost effectiveness, compactness and efficiency.



Die-cast aluminum · Stainless steel outrigger arm · Safety glass
Reflector made of pure anodized aluminum

LED color temperatures: 2700 K, 3000 K, 3500 K, 4000 K

BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations
Protection class IP 65

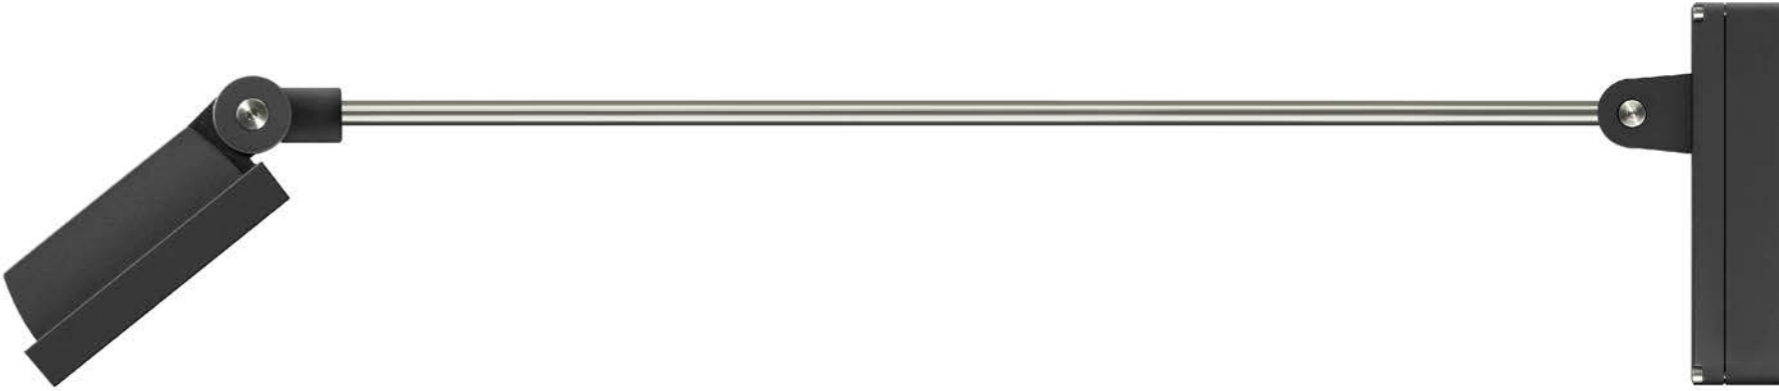

Floodlights with outrigger arm · very wide							
	LED	β	A	B	C	D	
77 552	17.9 W	75/88°	6 ½	27⅞	2	7⅞	70 500
77 559	27.9 W	87/93°	9	27⅞	2¼	9⅞	70 502

Floodlights with outrigger arm · flat beam							
	LED	β	A	B	C	D	
77 551	17.9 W	29/86°	6 ½	27⅞	2	7⅞	70 500
77 558	27.9 W	39/94°	9	27⅞	2¼	9⅞	70 502

180° glare shield β = Beam angle