


Wide beam light distribution

**On-ground luminaires**  
with wide beam light distribution



Ground mounted luminaire for illuminating horizontal surfaces from low mounting heights. This luminaire is ideally suited for providing spatial illumination in squares, entrances and wide pathways in private and public areas. Provided with a mounting system that allows the luminaire to be adjusted independent of anchor bolt orientation.


Die-cast and extruded aluminum · Safety glass  
Reflector made of pure anodized aluminum

LED color temperatures: 2700 K, 3000 K, 3500 K, 4000 K


BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at [www.bega-us.com](http://www.bega-us.com)

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.


NRTL listed to North American standards · Suitable for wet locations  
Protection class IP 65



On-ground luminaire						Anchorage
	LED	A	B	C	D	
<b>77 735</b>	20.4 W	7 7⁄8	8 3⁄8	2 3⁄8	4 7⁄8	<b>79 824</b>

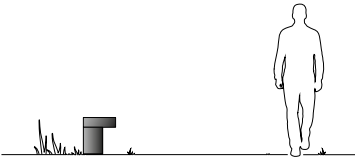

**Urban furniture**  
with wide beam light distribution



Wide beam light distribution

This distinctive and robust luminaire provides light with wide beam distribution on one side for a illuminating surfaces or pathways from one side of boundaries. Provided with mounting system that allows the luminaire to be adjusted independent of anchor bolt orientation.


Die-cast and extruded aluminum · Safety glass  
Reflector made of pure anodized aluminum

LED color temperatures: 2700 K, 3000 K, 3500 K, 4000 K

BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at [www.bega-us.com](http://www.bega-us.com)

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations  
Protection class IP 65



Urban furniture						Anchorage
	LED	A	B	C	D	
<b>77 754</b>	11.8 W	15 3⁄4	18 1⁄4	4 3⁄4	9 1⁄2	<b>79 808</b>

