







Urban furniture

A series of robust design elements with shielded or unshielded light. The unshielded light of this luminaire family is ideally suited for structuring and dividing open spaces. BEGA light design elements are like luminous sculptures, ideal for sophisticated arrangements of open spaces, along pathways and on roof terraces.

Die-cast aluminum · White acrylic diffuser or clear safety glass

LED color temperatures: 2700 K, 3000 K, 3500 K, 4000 K


BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure [®] finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations Protection class IP 65




Unshie				
	LED	Α	В	Anchorage
77 764	16.8 W	153/4	18	79812



Round				
	LED	Α	В	Anchorage
77 744	15.6 W	153/4	17 1/2	79 811

Square				
	LED	Α	В	Anchorage
77 786	15.6 W	15 3/4	17 1/2	79 804

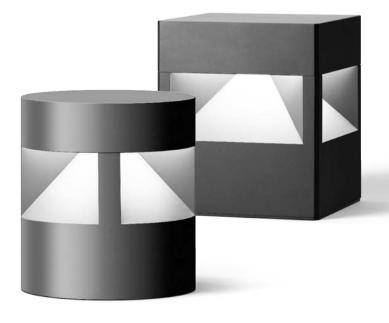



222