



Light building elements, Page 312

Shielded bollards

A series of bollard luminaires with shielded light distribution. The 88 062 has an internal adjusting device, which allows the light distribution to be adjusted on either side of the luminaire changing symmetric light to asymmetric light from the same luminaire. Provided with mounting system that allows the luminaire to be adjusted independent of anchor bolt orientation.


Die-cast and extruded aluminum · Clear safety glass
Reflector made of pure anodized aluminum

LED color temperatures: 2700 K, 3000 K, 3500 K, 4000 K

BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations
Protection class IP 65

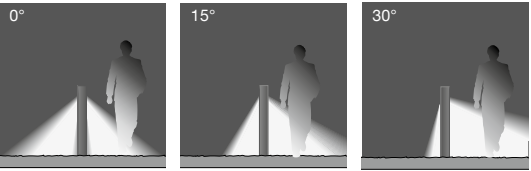

Adjustable light distribution

		Bollard with symmetric light distribution				
	LED	A	B	C	Anchorage	
88 066	10.5 W	10 5⁄8	23 3⁄4	5 1⁄2	79 817	

		Bollard with adjustable light distribution				
	LED	A	B	C	Anchorage	
88 062	25.3 W	10 5⁄8	43 3⁄8	5 1⁄2	79 817	

