



Shielded bollards
with directed light

A series of bollard luminaires with shielded, directed light and single or twin luminaire heads. Luminaires for illuminating entrances, paths and many areas of public and private spaces. These luminaires provide glare-free illumination with a high degree of visual comfort for the uniform lighting of ground surfaces. Provided with mounting system that allows the luminaire to be adjusted independent of anchor bolt orientation.

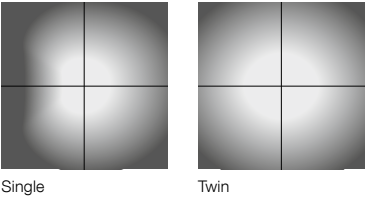
Die-cast and extruded aluminum · Polycarbonate diffuser with optical texture
Reflector made of pure anodized aluminum



LED color temperatures: 2700 K, 3000 K, 3500 K, 4000 K

BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations
Protection class IP 65



	Single bollard				
	LED	A	B	C	Anchorage
	77 221	7.8 W	7 ½	39 ½	11
					79 817
	Twin bollard				
	LED	A	B	C	Anchorage
	77 321	(2) 7.8 W	7 ½	39 ½	18 ¾
					79 817

