



Light building elements

Unshielded light, symmetric or asymmetric wide beam light distribution

Designed with exquisite visual interest for the illumination of walkways and open pedestrian scale landscape areas featuring symmetric and asymmetric wide beam distributions.



Die-cast and extruded aluminum · Clear or white acrylic diffuser

LED color temperatures: 2700 K, 3000 K, 3500 K, 4000 K

BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations
Protection class IP 65

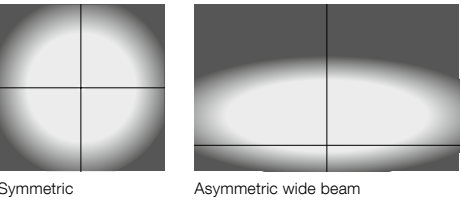

Unshielded					
	LED	A	B	C	D
88 157	23.2 W	20 ⅓	21 ⅓	154	31 ½
Symmetric					
	LED	A	B	C	D
88 165	23.2 W	20 ⅓	21 ⅓	154	31 ½
Asymmetric wide beam					
	LED	A	B	C	D
88 166	23.2 W	20 ⅓	21 ⅓	154	31 ½

