



Area/roadway luminaires
with asymmetric and asymmetric wide beam light distribution

A series of area/roadway luminaires with asymmetric or asymmetric wide beam light distribution. These luminaires are available in single head, twin head and davit arm mountings. This family of luminaires is designed specifically to illuminate streets, squares, access roads and pedestrian zones with maximum glare control and minimal spill light.



Die-cast aluminum · Clear safety glass with anti-reflective coating for increased transmission
Reflector made of pure anodized aluminum

LED color temperatures: 2700K, 3000K, 3500K, 4000K

BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com


All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations · Protection class IP 66

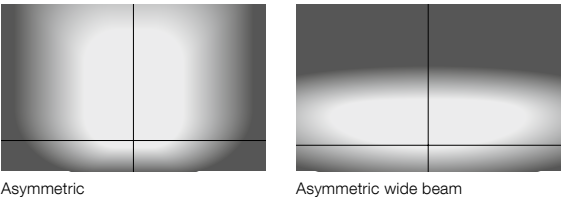

Pole-top luminaires · asymmetric					
	LED		A	B	C
99 515	23.3 W	Single	10	2 3⁄8	17 ¼
99 519	31.5 W	Single	10	2 3⁄8	17 ¼
99 528	(2) 23.3 W	Twin	10	2 3⁄8	32
99 529	(2) 31.5 W	Twin	10	2 3⁄8	32

Pole-top luminaires · asymmetric wide beam					
	LED		A	B	C
99 446	11.8 W	Single	10	2 3⁄8	17 ¼
99 491	15.8 W	Single	10	2 3⁄8	17 ¼
99 499	23.6 W	Single	10	2 3⁄8	17 ¼
99 556	31.4 W	Single	10	2 3⁄8	17 ¼
99 447	(2) 11.8 W	Twin	10	2 3⁄8	32
99 472	(2) 15.8 W	Twin	10	2 3⁄8	32
99 473	(2) 23.6 W	Twin	10	2 3⁄8	32
99 474	(2) 31.4 W	Twin	10	2 3⁄8	32

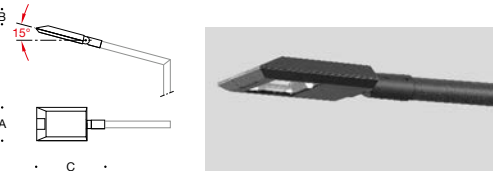

Davit arm luminaires · asymmetric wide beam					
	LED		A	B	C
99 467	11.8 W		10	2 3⁄8	19 ¼
99 426	15.8 W		10	2 3⁄8	19 ¼
99 427	23.6 W		10	2 3⁄8	19 ¼
99 433	31.4 W		10	2 3⁄8	19 ¼

Poles for above luminaires – see page 406 - 411.





Area/roadway luminaires
with asymmetric and asymmetric wide beam light distribution

A series of area/roadway luminaires with asymmetric or asymmetric wide beam light distribution. These luminaires are available in single head, twin head and davit arm mountings. This family of luminaires is designed specifically to illuminate streets, squares, access roads and pedestrian zones with maximum glare control and minimal spill light.



Die-cast aluminum · Clear safety glass with anti-reflective coating for increased transmission
Reflector made of pure anodized aluminum

LED color temperatures: 2700K, 3000K, 3500K, 4000K

BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com


All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations · Protection class IP 66

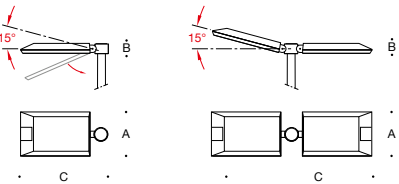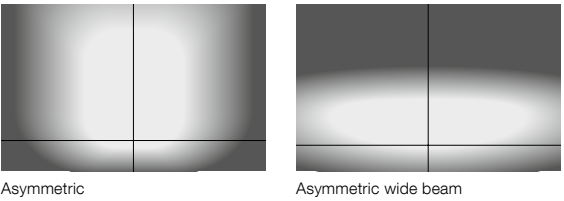


Pole-top luminaires · asymmetric					
LED			A	B	C
99 522	47.2 W	Single	13%	3	25 7/8
99 523	62.0 W	Single	13%	3	25 7/8
99 532	(2) 47.2 W	Twin	13%	3	47 1/4
99 533	(2) 62.0 W	Twin	13%	3	47 1/4

Pole-top luminaires · asymmetric wide beam					
LED			A	B	C
99 595	47.2 W	Single	13%	3	25 7/8
99 596	70.4 W	Single	13%	3	25 7/8
99 478	(2) 47.2 W	Twin	13%	3	47 1/4
99 479	(2) 70.4 W	Twin	13%	3	47 1/4

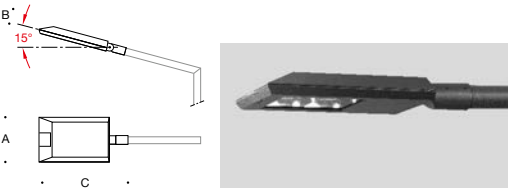

Davit arm luminaires · asymmetrical wide beam					
LED			A	B	C
99 454	47.2 W		13%	3	27 1/4
99 465	70.4 W		13%	3	27 1/4

Poles for above luminaires – see page 406 - 411.

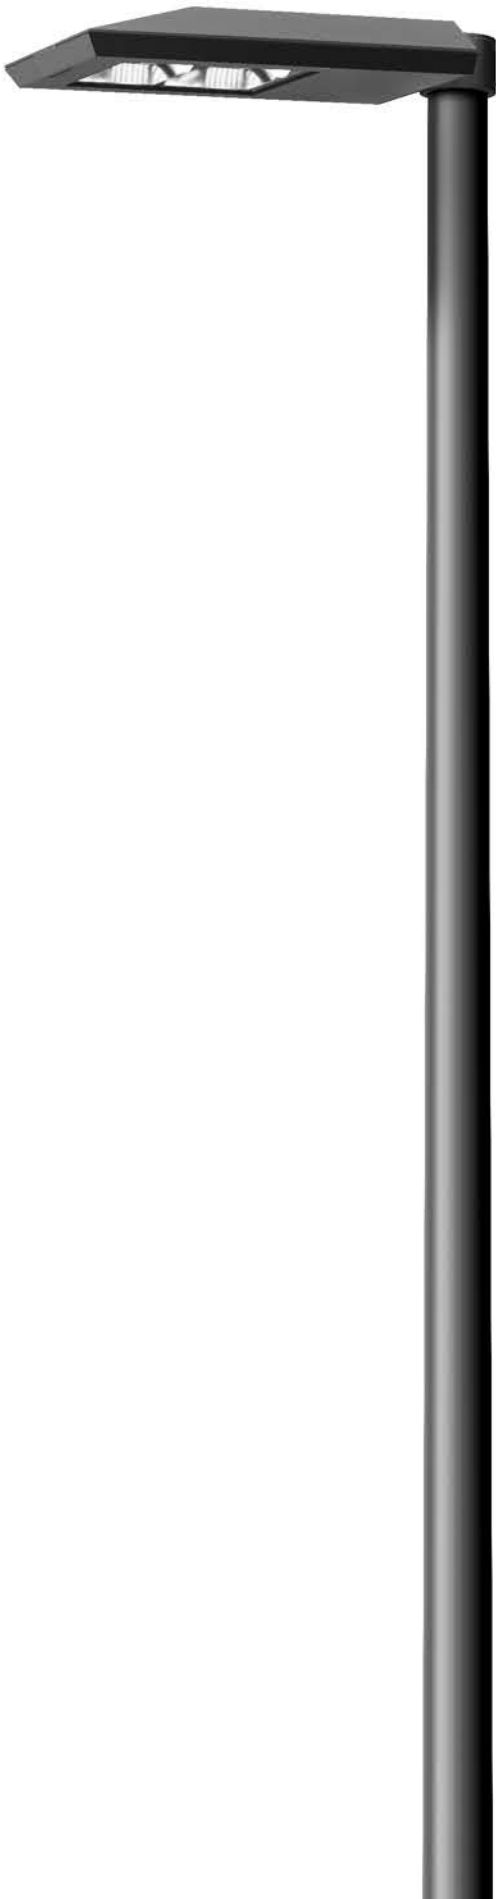



Area/roadway luminaires
with asymmetric and asymmetric wide beam light distribution

A series of single and twin area/roadway luminaires with asymmetric or asymmetric wide beam light distribution. This family of luminaires is designed specifically to illuminate streets, squares, access roads and pedestrian zones with maximum glare control and minimal spill light.


Die-cast aluminum · Clear safety glass with anti-reflective coating for increased transmission
Reflector made of pure anodized aluminum

LED color temperatures: 2700K, 3000K, 3500K, 4000K


BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.


NRTL listed to North American standards · Suitable for wet locations · Protection class IP 66



Asymmetric



Asymmetric wide beam

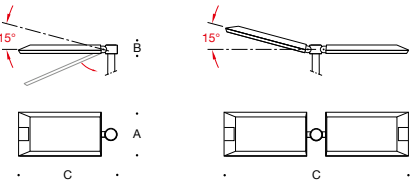

Pole-top luminaires · asymmetric					
	LED		A	B	C
99 527	94.2 W	Single	13 ⅜	3	32 ⅛
99 534	(2) 94.2 W	Twin	13 ⅜	3	60 ⅜

Pole-top luminaires · asymmetric wide beam					
	LED		A	B	C
99 599	94.2 W	Single	13 ⅜	3	32 ⅛
99 481	(2) 94.2 W	Twin	13 ⅜	3	60 ⅜

Poles for above luminaires – see page 406 - 411.

