



**Area/roadway luminaires**  
with outrigger arm and asymmetric wide beam light distribution

A series of single and twin area/roadway luminaires with asymmetric wide beam light distribution and outrigger arm. This family of luminaires is designed specifically to illuminate roadways with maximum glare control and minimal spill light.


- Die-cast aluminum
- Clear safety glass with anti-reflective coating for increased transmission
- Reflector made of pure anodized aluminum

LED color temperatures: 2700 K, 3000 K, 3500 K, 4000 K


BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at [www.bega-us.com](http://www.bega-us.com)

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations  
Protection class IP 66



Asymmetric wide beam

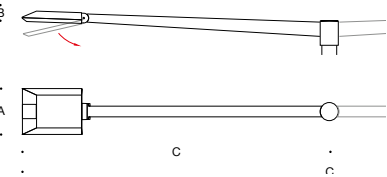

| Pole-top luminaires · outrigger · <b>single</b> |        |     |    |      |  |
|---|--------|-----|----|------|--|
|   | LED    | A   | B  | C    |  |
| <b>77 718</b>                                   | 35.2 W | 10  | 2% | 68 ¼ |  |
| <b>77 728</b>                                   | 47.2 W | 13% | 3  | 76 ½ |  |
| <b>77 732</b>                                   | 70.4 W | 13% | 3  | 76 ½ |  |

| Pole-top luminaires · outrigger · <b>twin</b> |            |     |    |       |  |
|---|------------|-----|----|-------|--|
|   | LED        | A   | B  | C     |  |
| <b>77 736</b>                                 | (2) 35.2 W | 10  | 2% | 133 ½ |  |
| <b>77 758</b>                                 | (2) 47.2 W | 13% | 3  | 149 ¼ |  |
| <b>77 759</b>                                 | (2) 70.4 W | 13% | 3  | 149 ¼ |  |

Poles for above luminaires – see page 406 - 411.

