


Asymmetric



Asymmetric wide beam

Pole-top luminaires
with asymmetric light distribution

A series of single and twin pole-top luminaires with asymmetric forward throw or asymmetric wide spread light distribution. The asymmetric forward throw luminaires provide light in front of the luminaire to uniformly wash surfaces. The wide spread light distribution is ideally suited for illuminating roads and pathways.


Die-cast aluminum · Clear safety glass
Reflector made of pure anodized aluminum

LED color temperatures: 2700K, 3000K, 3500K, 4000K

BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations
Protection class IP 66

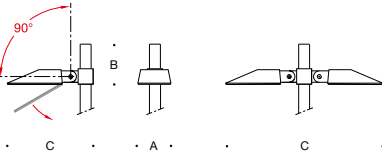

Pole-top luminaires · asymmetric					
	LED		A	B	C
84 247	21.3 W	Single	8 7⁄8	10 7⁄8	21 ¾
84 407	55.3 W	Single	8 7⁄8	10 7⁄8	21 ¾
84 250	98.3 W	Single	12 ¾	11 ½	38 ¾
84 248 (2)	21.3 W	Twin	8 7⁄8	10 7⁄8	21 ¾
84 249 (2)	55.3 W	Twin	8 7⁄8	10 7⁄8	21 ¾
84 251 (2)	98.3 W	Twin	12 ¾	11 ½	38 ¾

Pole-top luminaires · asymmetric wide beam					
	LED		A	B	C
77 025	15.4 W	Single	8 7⁄8	10 7⁄8	21 ¾
84 254 (2)	15.4 W	Twin	8 7⁄8	10 7⁄8	38 ¾

Poles for above luminaires – see page 406 - 411.

