



Pole-top luminaires
with asymmetric wide beam light distribution

A series of single and twin pole-top luminaires with asymmetric wide beam light distribution. These luminaires are designed to illuminate roadways, squares, driveways and pedestrian areas.


Die-cast and extruded aluminum · Clear acrylic diffuser with optical texture
Reflector made of pure anodized aluminum

LED color temperatures: 2700 K, 3000 K, 3500 K, 4000 K


BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations
Protection class IP 66



Asymmetric wide beam

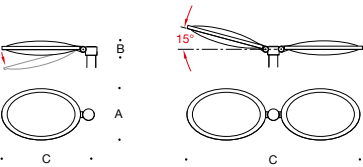

Pole-top luminaires · single				
	LED	A	B	C
77 834	11.4 W	15 ⅞	5 ¼	29 ½
77 836	30.8 W	15 ⅞	5 ¼	29 ½
77 520	57.4 W	15 ⅞	5 ¼	29 ½

Pole-top luminaires · twin				
	LED	A	B	C
77 839	(2) 11.4 W	15 ⅞	5 ¼	55
77 841	(2) 30.8 W	15 ⅞	5 ¼	55
77 530	(2) 57.4 W	15 ⅞	5 ¼	55

Poles for above luminaires – see page 406 - 411.

