



Pole-top luminaires

with symmetric or asymmetric wide beam light distribution

A series of pole-top luminaires with symmetric or asymmetric wide beam light distribution. The symmetric light distribution is ideal for illuminating squares, plazas and other open areas while the asymmetric wide beam light distribution is ideal for illuminating streets and pathways.


Die-cast and extruded aluminum · Clear acrylic diffuser
Reflector made of pure anodized aluminum

LED color temperatures: 2700K, 3000K, 3500K, 4000K

BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com


All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations · Protection class IP 65

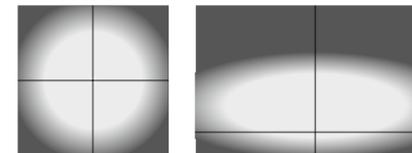

Symmetric

Asymmetric wide beam



Pole-top luminaires · symmetric

	LED	A	B
77 175	31.0 W	6 3/4"	25 7/8"

Pole-top luminaires · asymmetric wide beam

	Lamp	A	B
77 176	31.0 W LED	6 3/4"	25 7/8"



Pole-top luminaires · symmetric

	Lamp	A	B
77 164	31.0 W LED	10 1/4"	25 7/8"

Pole-top luminaires · asymmetric wide beam

	Lamp	A	B
77 165	31.0 W LED	10 1/4"	25 7/8"

Poles for above luminaires – see page 406 - 411.

